


Slit Width 223mm
 Lay Flat 108mm (+1mm/-0mm)
 20mm 88mm
 Seam Area 7mm
 Cut Height 265.1125mm

EASY to USE
1-2-3



Triple Seal Protection™
ENGINE BLOCK STOP LEAK


- 1 FAST ACTING BEADS**
Quickly Locate Leaks
- 2 KEVLAR® RESIN**
Binds to Metal
- 3 ACRYLIC HARDENER**
Makes Seal Permanent

BY DUPONT KEVLAR™
Will Not Block or Corrode
Safe for All Cooling Systems

CAUTION: EYE IRRITANT.
 Read carefully other cautions on back panel

16.5 FL OZ (1.03 PT) 488 mL
2.2 OZ (65 g) SOLIDS

EASY to USE
1-2-3



ENGINE BLOCK STOP LEAK

TO REMOVE CAP, REMOVE FILM, PINCH CAP, AND TURN

Prestone® Triple Seal Protection Engine Block Stop Leak with Kevlar® Resin stops engine block leaks fast, seals them permanently, and won't harm your cooling system.

Triple Seal Protection is an advanced formulation that speeds leak-seeking chemicals through your system to help keep your cooling system working and your car running.

CAUTION: Never open a hot cooling system.

NOTE: Dirty or clogged systems should be flushed with *Prestone® Flush + Cleaner* and refilled before use.

NOTE: Treats systems up to 12 quarts. Compatible with all colors of antifreeze/coolant.

RECOMMENDATION: Contact vehicle manufacturer for specific cooling system questions.

DIRECTIONS: Do not add to overflow tank. Add to radiator or pressurized surge tank. Ensure engine is off and cool to the touch.

- 1) Pre-dilute beads in warm water, open cooling system, and add pre-diluted liquid mixture to cooling system.
- 2) Pour entire contents of both liquids into the cooling system.
- 3) Top off with 50% *Prestone® Antifreeze* and close cooling system.
- 4) Run engine at idle with heater set to high for 20 minutes after reaching normal operating temperature, and shut off the engine.
- 5) After cooling, check the coolant level frequently and top off with 50% *Prestone® Antifreeze* as needed.

Meets ASTM D3147, D6107, D1384, D4340, and D1881 specifications.

DO NOT REUSE BOTTLE


CAUTION: EYE IRRITANT. Contains water (7732-18-5), non-hazardous proprietary ingredients, sodium silicate (1344-09-8), and crystalline silica, quartz (14808-60-7). May cause skin irritation. Avoid contact with eyes and prolonged skin contact. Do not swallow. **Eye Contact:** Flush with water for at least 15 minutes. Seek medical attention if irritation persists. **Skin Contact:** Wash thoroughly with soap and water. Seek medical attention if irritation or other symptoms develop. **If swallowed:** Call a physician or poison center. Do not induce vomiting.

KEEP OUT OF THE REACH OF CHILDREN AND PETS.

DuPont®, Kevlar® and the K Kevlar logo™ are trademarks of E. I. du Pont de Nemours and Company and are used under license by Prestone Products Corporation.

WARNING: Cancer - www.P65Warnings.ca.gov

PRESTONE PRODUCTS CORPORATION
 69 Eagle Road, Danbury, CT 06810
 Questions? Comments?
 Call 1-888-269-0750
 www.prestone.com
 AS-661Y P-6226 SDS 698
 Made in the U.S.A. with domestic and imported materials
 Patents: www.Prestone.com/patents



FOLD FOLD



The colors indicated are a representation. Press will match spot colors to the appropriate color guide. Process images will be matched to a color controlled proof. alexm


To avoid delays, please approve this proof by end of day Monday January 15, 2018. Return proof to If approving this item by fax, please send this page only

Approved As Is **Submit New Proof**

Signature _____

Date _____

CSR	Stephanie Jorgenson		
Email	sjorgenson@wspackaging.com		
Phone	920-487-6250	Fax	+1 920-487-5644

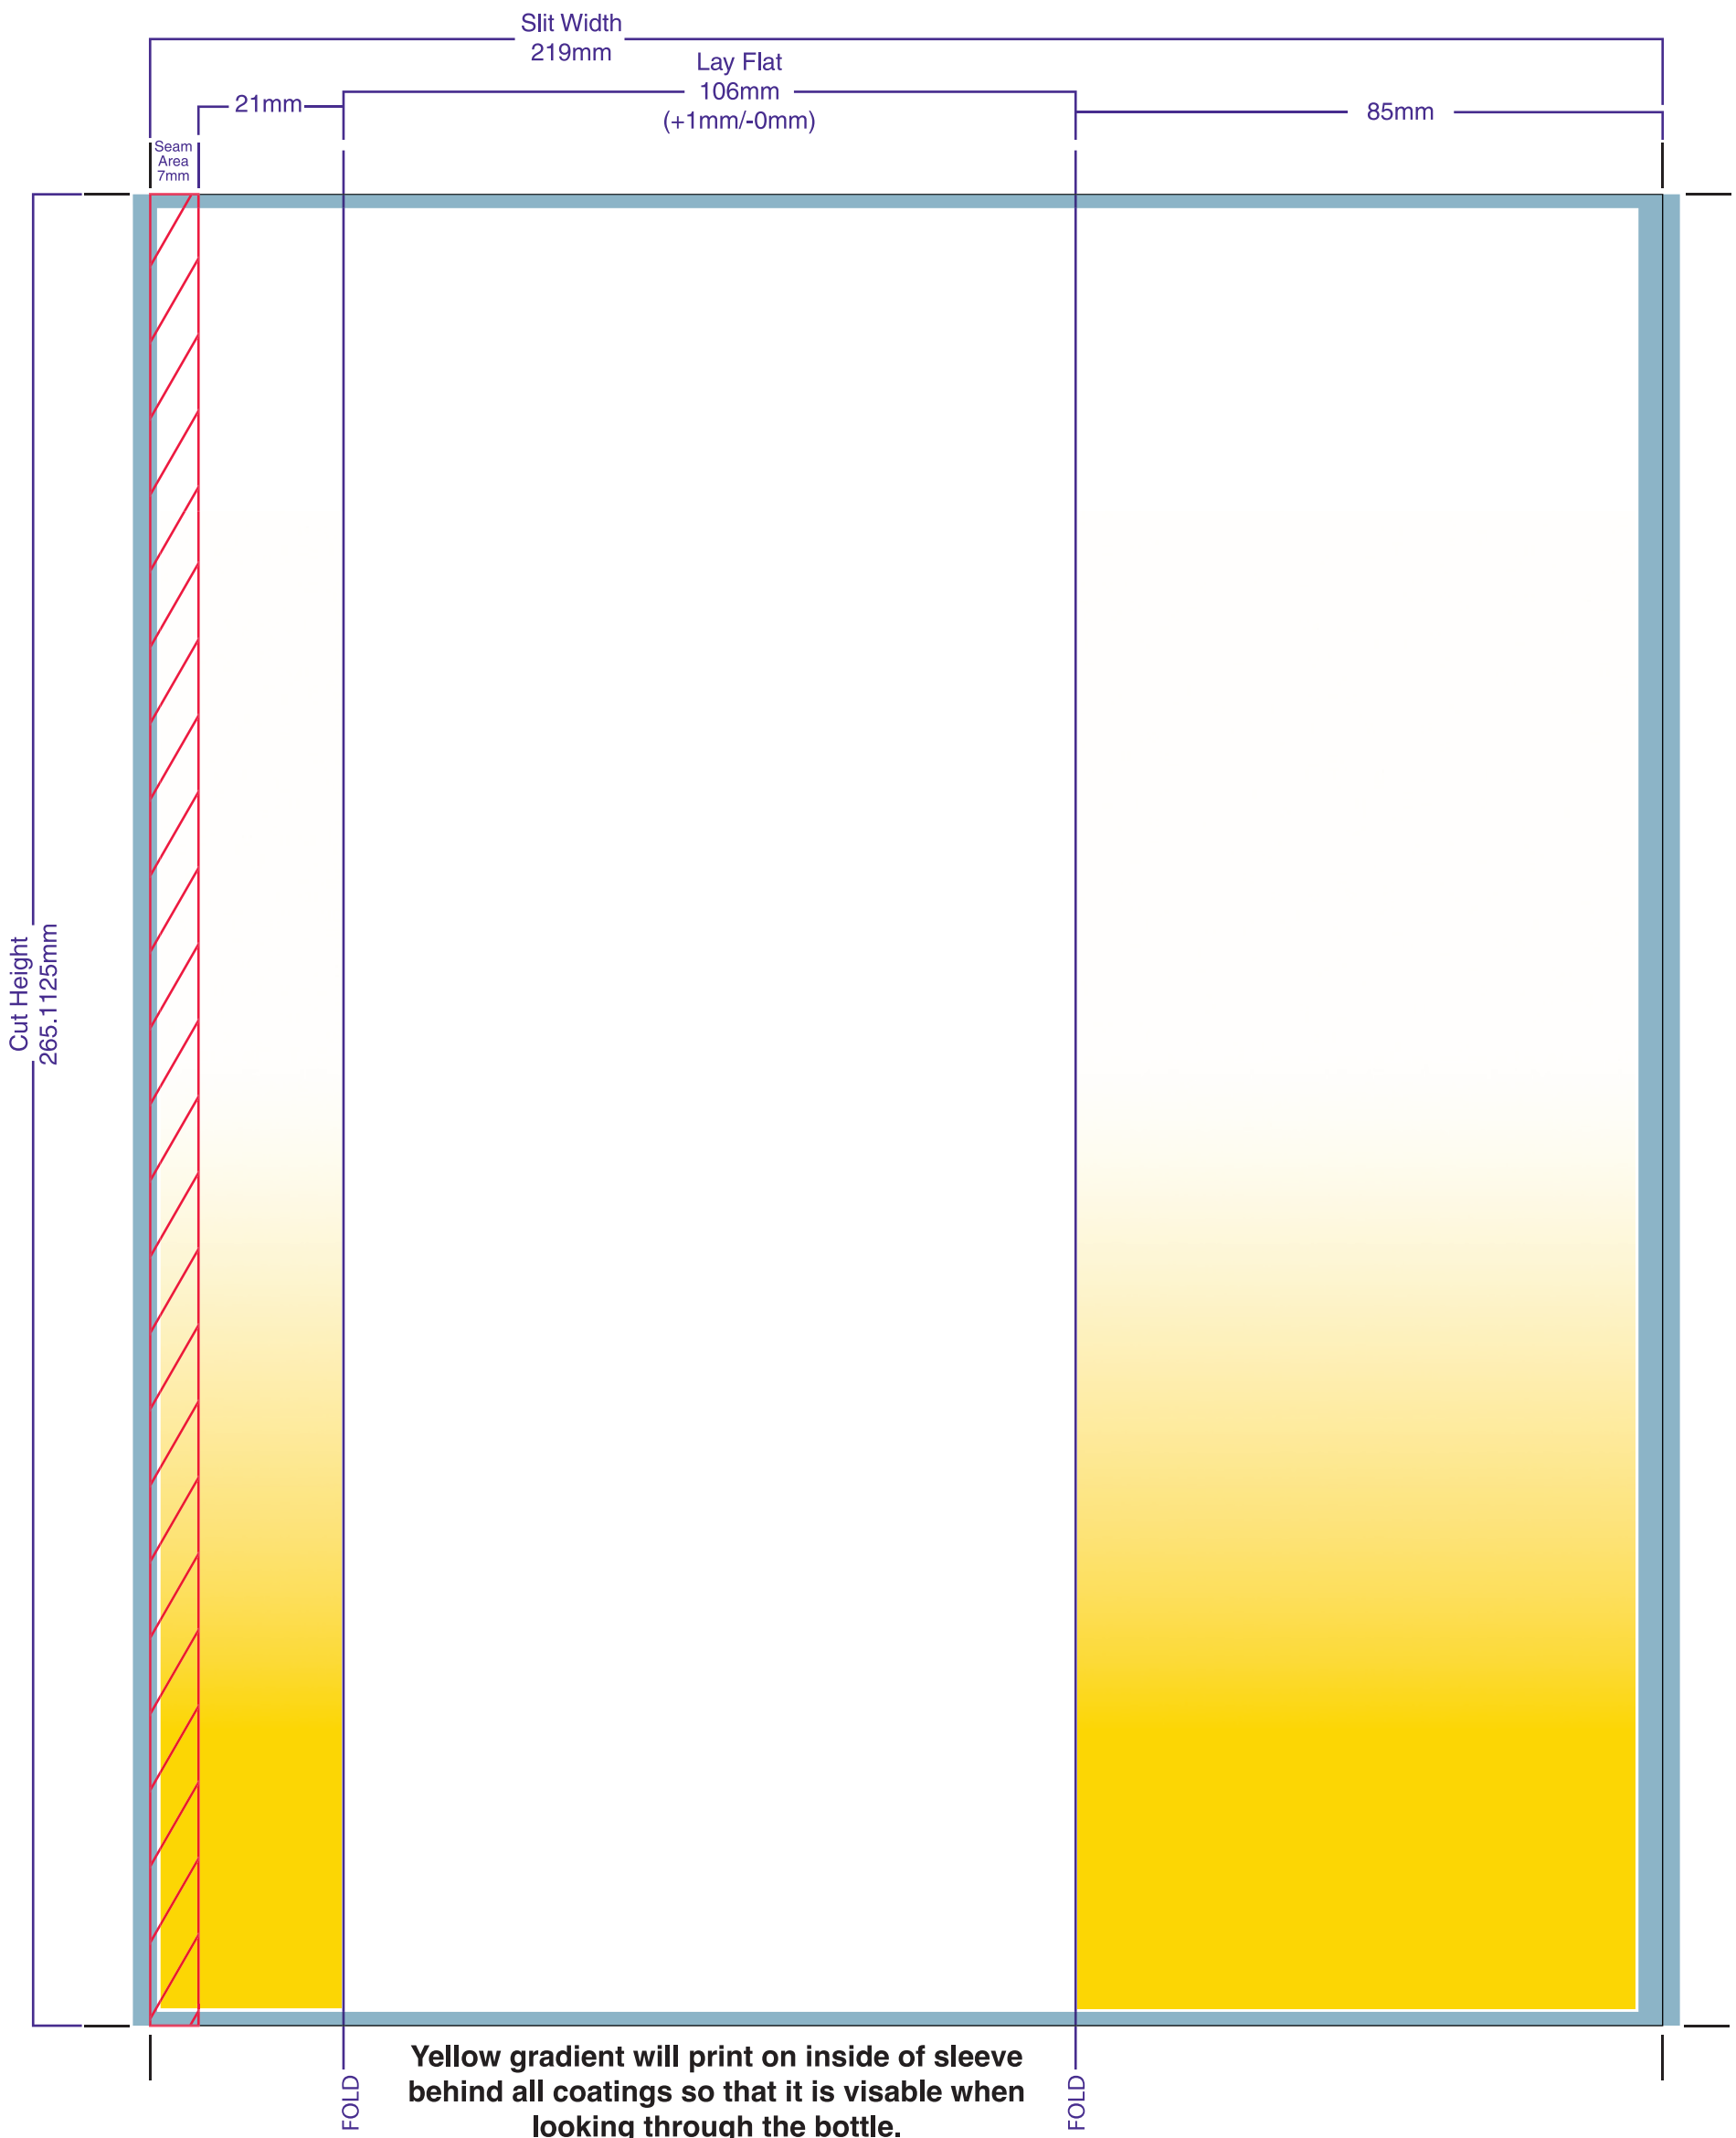

The colors indicated are a representation. Press will match spot colors to the appropriate color guide. Process images will be matched to a color controlled proof.

alexm

To avoid delays, please approve this proof by end of day Monday January 15, 2018.

Slit Width 223mm
Lay Flat 108mm (+1mm/-0mm)
88mm
20mm
Seam Area 7mm
Cut Height 265.1125mm

EASY to USE
1-2-3

Prestone
Trusted Quality Since 1927

EASY to USE
1-2-3

Prestone
Trusted Quality Since 1927

ENGINE BLOCK STOP LEAK

Triple Seal Protection
ENGINE BLOCK STOP LEAK

1 FAST ACTING BEADS
Quickly Locate Leaks

2 KEVLAR® RESIN
Binds to Metal

3 ACRYLIC HARDENER
Makes Seal Permanent

BY DUPONT KEVLAR™
Will Not Block or Corrode
Safe for All Cooling Systems

CAUTION: EYE IRRITANT.
Read carefully other cautions on back panel
16.5 FL OZ (1.03 PT) 488 mL
2.2 OZ (65 g) SOLIDS

TO REMOVE CAP, REMOVE FILM, PINCH CAP, AND TURN









Prestone® Triple Seal Protection Engine Block Stop Leak with Kevlar® Resin stops engine block leaks fast, seals them permanently, and won't harm your cooling system. *Triple Seal Protection* is an advanced formulation that speeds leak-seeking chemicals through your system to help keep your cooling system working and your car running.
CAUTION: Never open a hot cooling system.
NOTE: Dirty or clogged systems should be flushed with *Prestone® Flush + Cleaner* and refilled before use.
NOTE: Treats systems up to 12 quarts. Compatible with all colors of antifreeze/coolant.
RECOMMENDATION: Contact vehicle manufacturer for specific cooling system questions.
DIRECTIONS: Do not add to overflow tank. Add to radiator or pressurized surge tank. Ensure engine is off and cool to the touch.
1) Pre-dilute beads in warm water, open cooling system, and add pre-diluted liquid mixture to cooling system.
2) Pour entire contents of both liquids into the cooling system.
3) Top off with 50% *Prestone® Antifreeze* and close cooling system.
4) Run engine at idle with heater set to high for 20 minutes after reaching normal operating temperature, and shut off the engine.
5) After cooling, check the coolant level frequently and top off with 50% *Prestone® Antifreeze* as needed.
Meets ASTM D3147, D6107, D1384, D4340, and D1881 specifications.
DO NOT REUSE BOTTLE

CAUTION: EYE IRRITANT. Contains water (7732-18-5), non-hazardous proprietary ingredients, sodium silicate (1344-09-8), and crystalline silica, quartz (14808-60-7). May cause skin irritation. Avoid contact with eyes and prolonged skin contact. Do not swallow. **Eye Contact:** Flush with water for at least 15 minutes. Seek medical attention if irritation persists. **Skin Contact:** Wash thoroughly with soap and water. Seek medical attention if irritation or other symptoms develop. **If swallowed:** Call a physician or poison center. Do not induce vomiting.
KEEP OUT OF THE REACH OF CHILDREN AND PETS.
DuPont®, Kevlar® and the K Kevlar logo™ are trademarks of E. I. du Pont de Nemours and Company and are used under license by Prestone Products Corporation.
WARNING: Cancer - www.P65Warnings.ca.gov

PRESTONE PRODUCTS CORPORATION
69 Eagle Road, Danbury, CT 06810
Questions? Comments?
Call 1-888-269-0750
www.prestone.com
AS-661Y P-6226 SDS 698
Made in the U.S.A. with domestic and imported materials
Patents: www.Prestone.com/patents

7 97496 87949 3


FOLD FOLD



The colors indicated are a representation. Press will match spot colors to the appropriate color guide. Process images will be matched to a color controlled proof.

alexm


To avoid delays, please approve this proof by end of day Monday January 15, 2018.

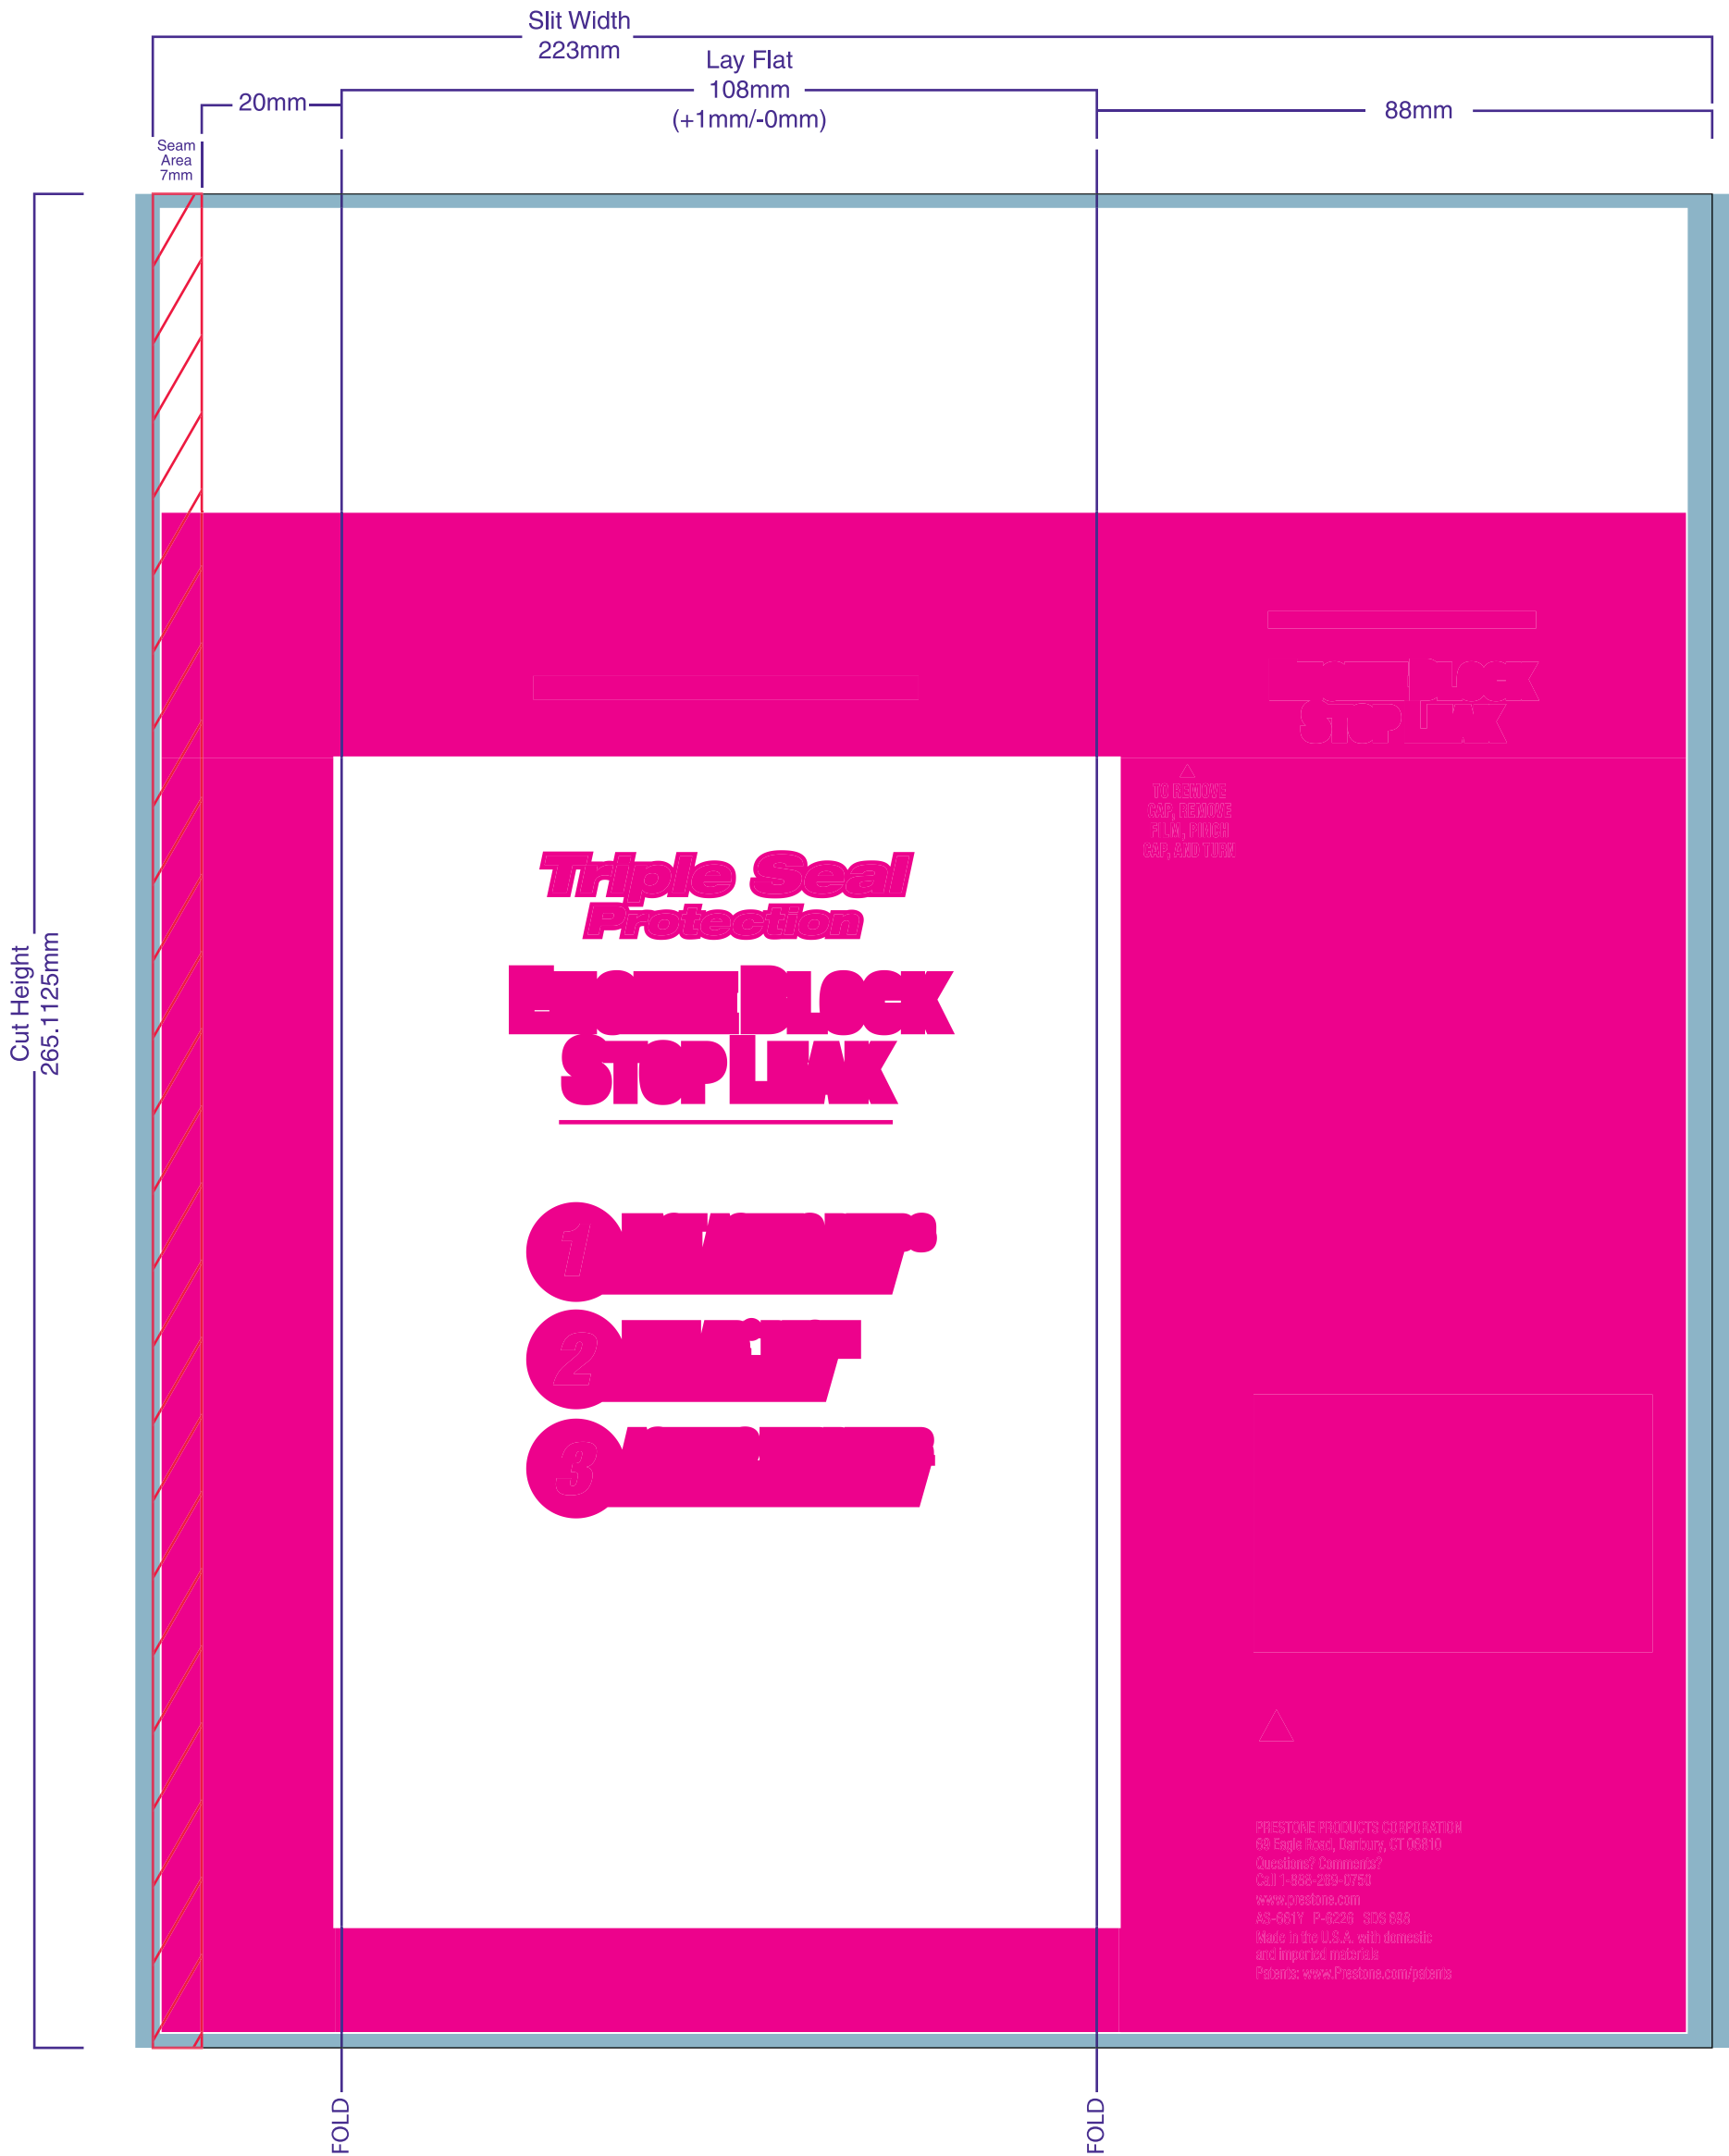

This page represents the print location of white ink.

alexm


To avoid delays, please approve this proof by end of day Monday January 15, 2018.

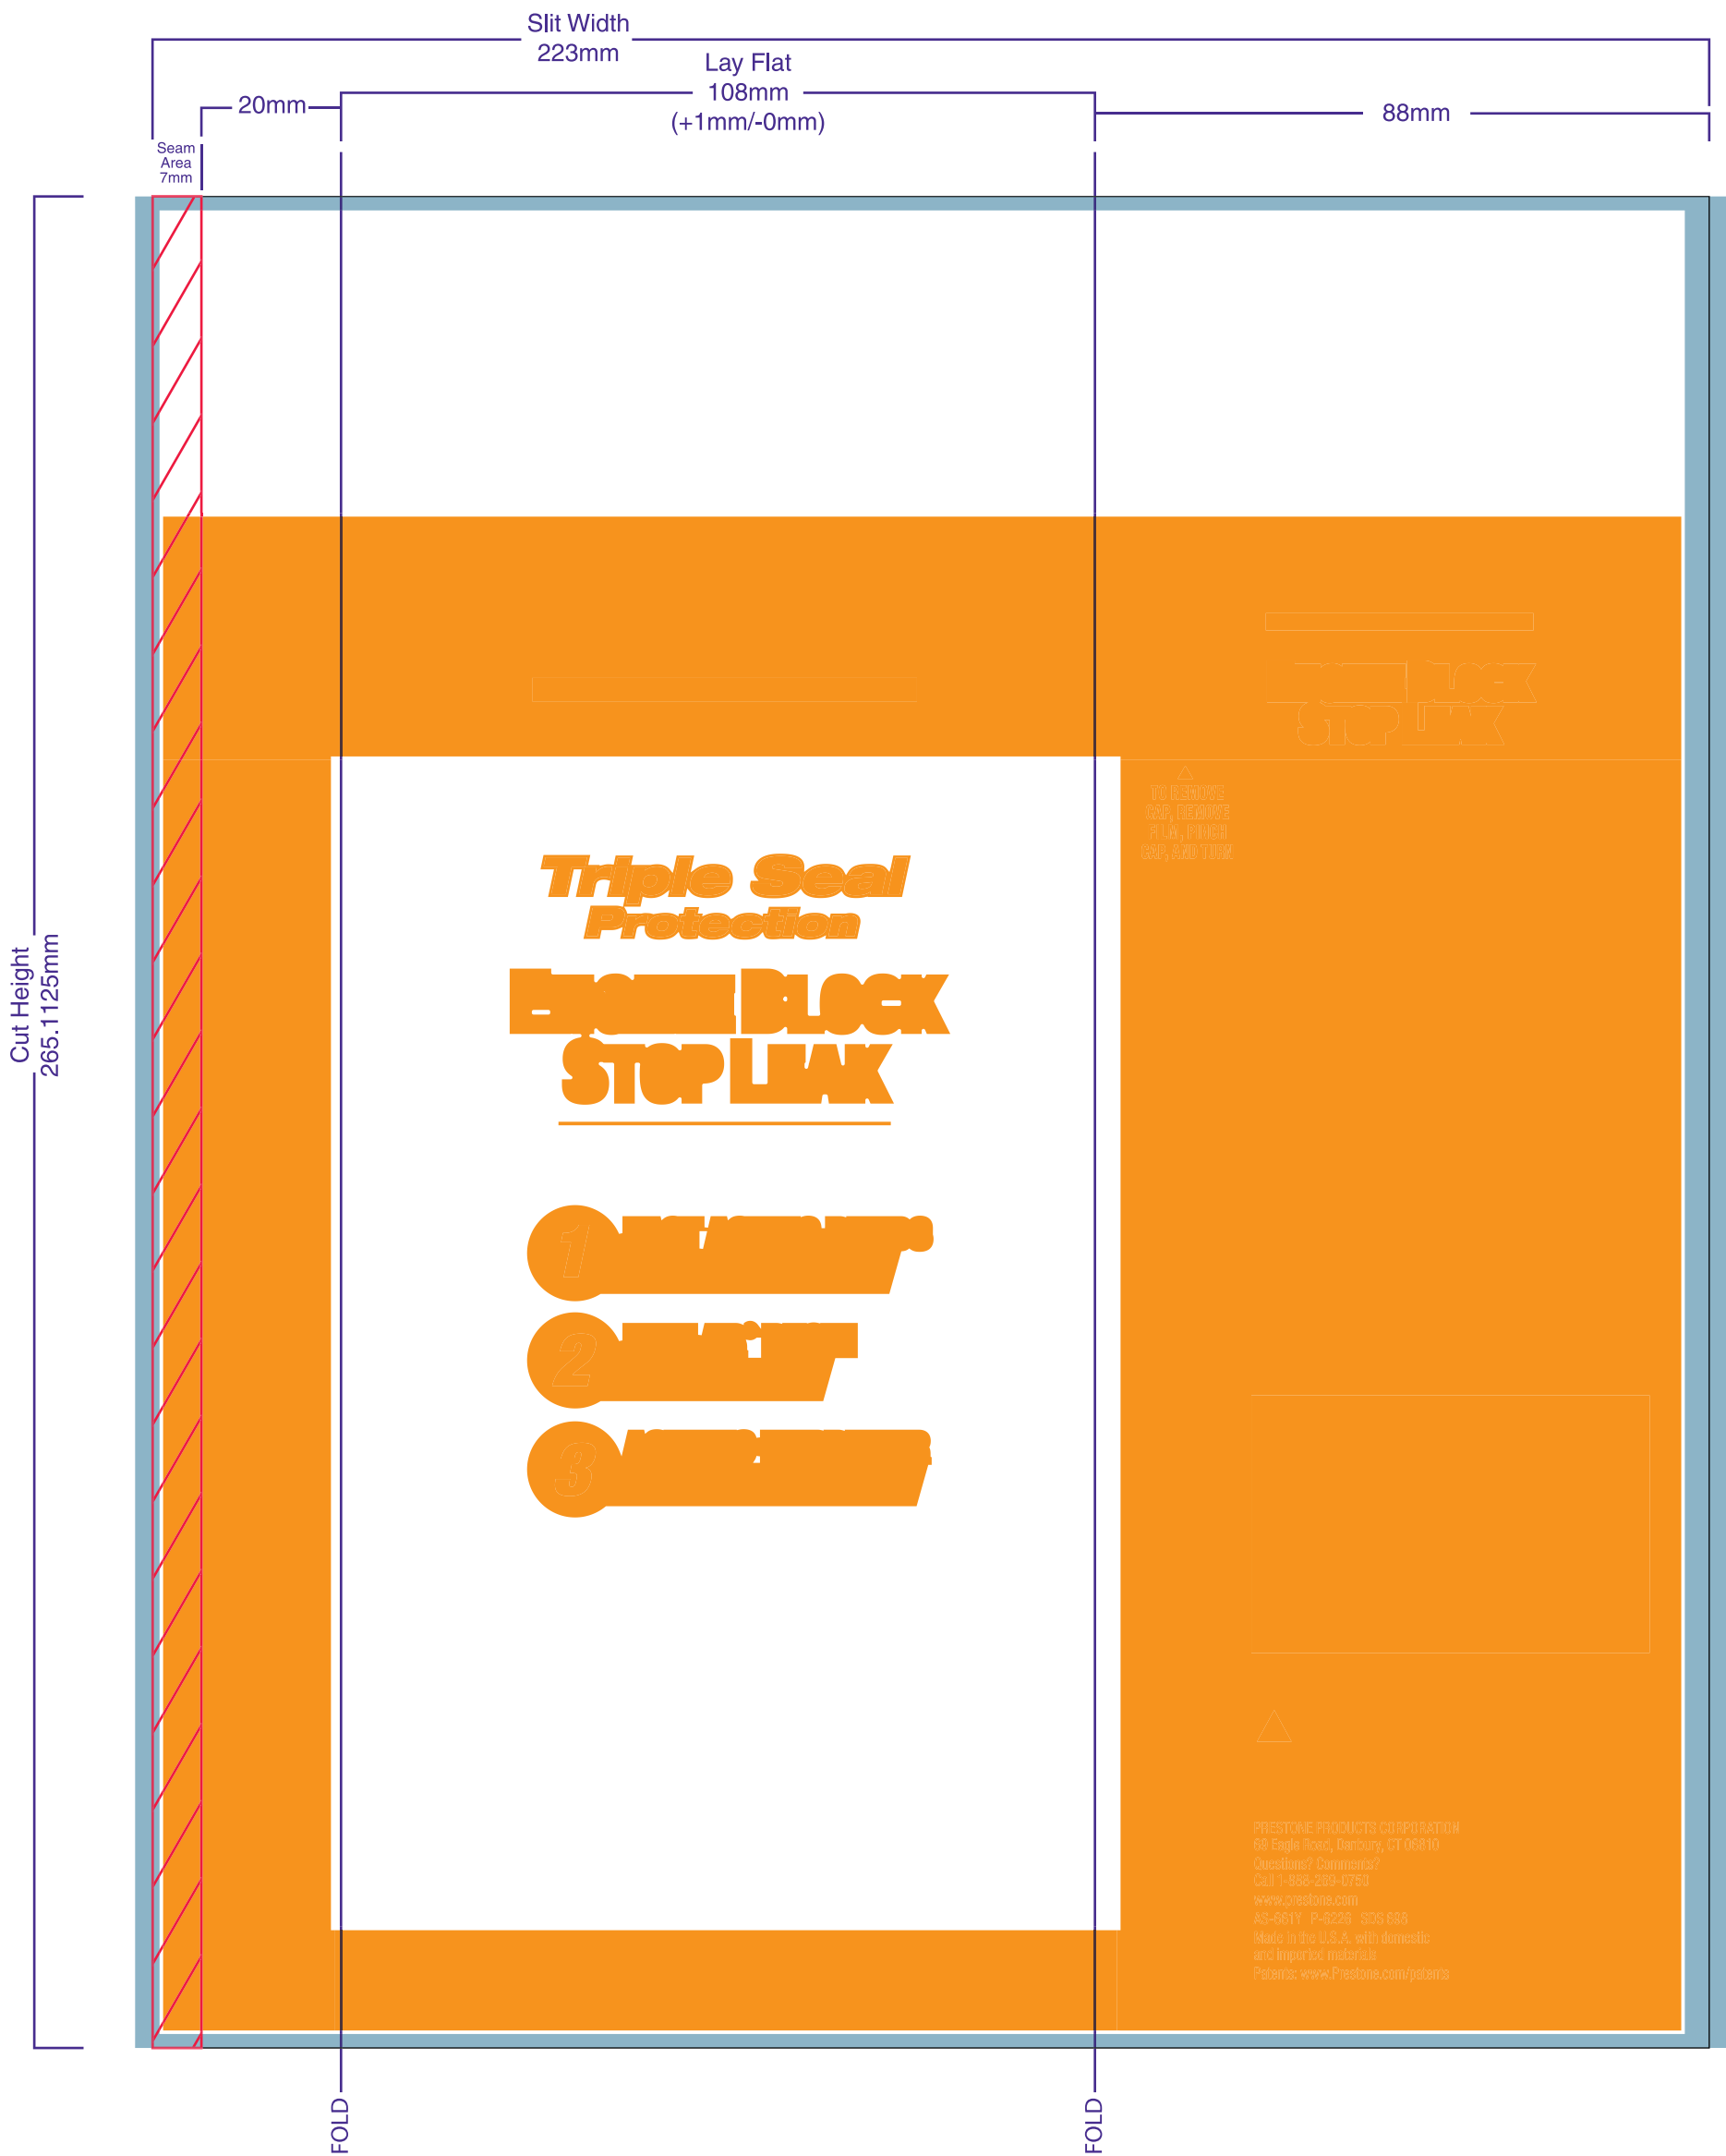

This page represents the print location of white ink.

alexm

To avoid delays, please approve this proof by end of day Monday January 15, 2018.

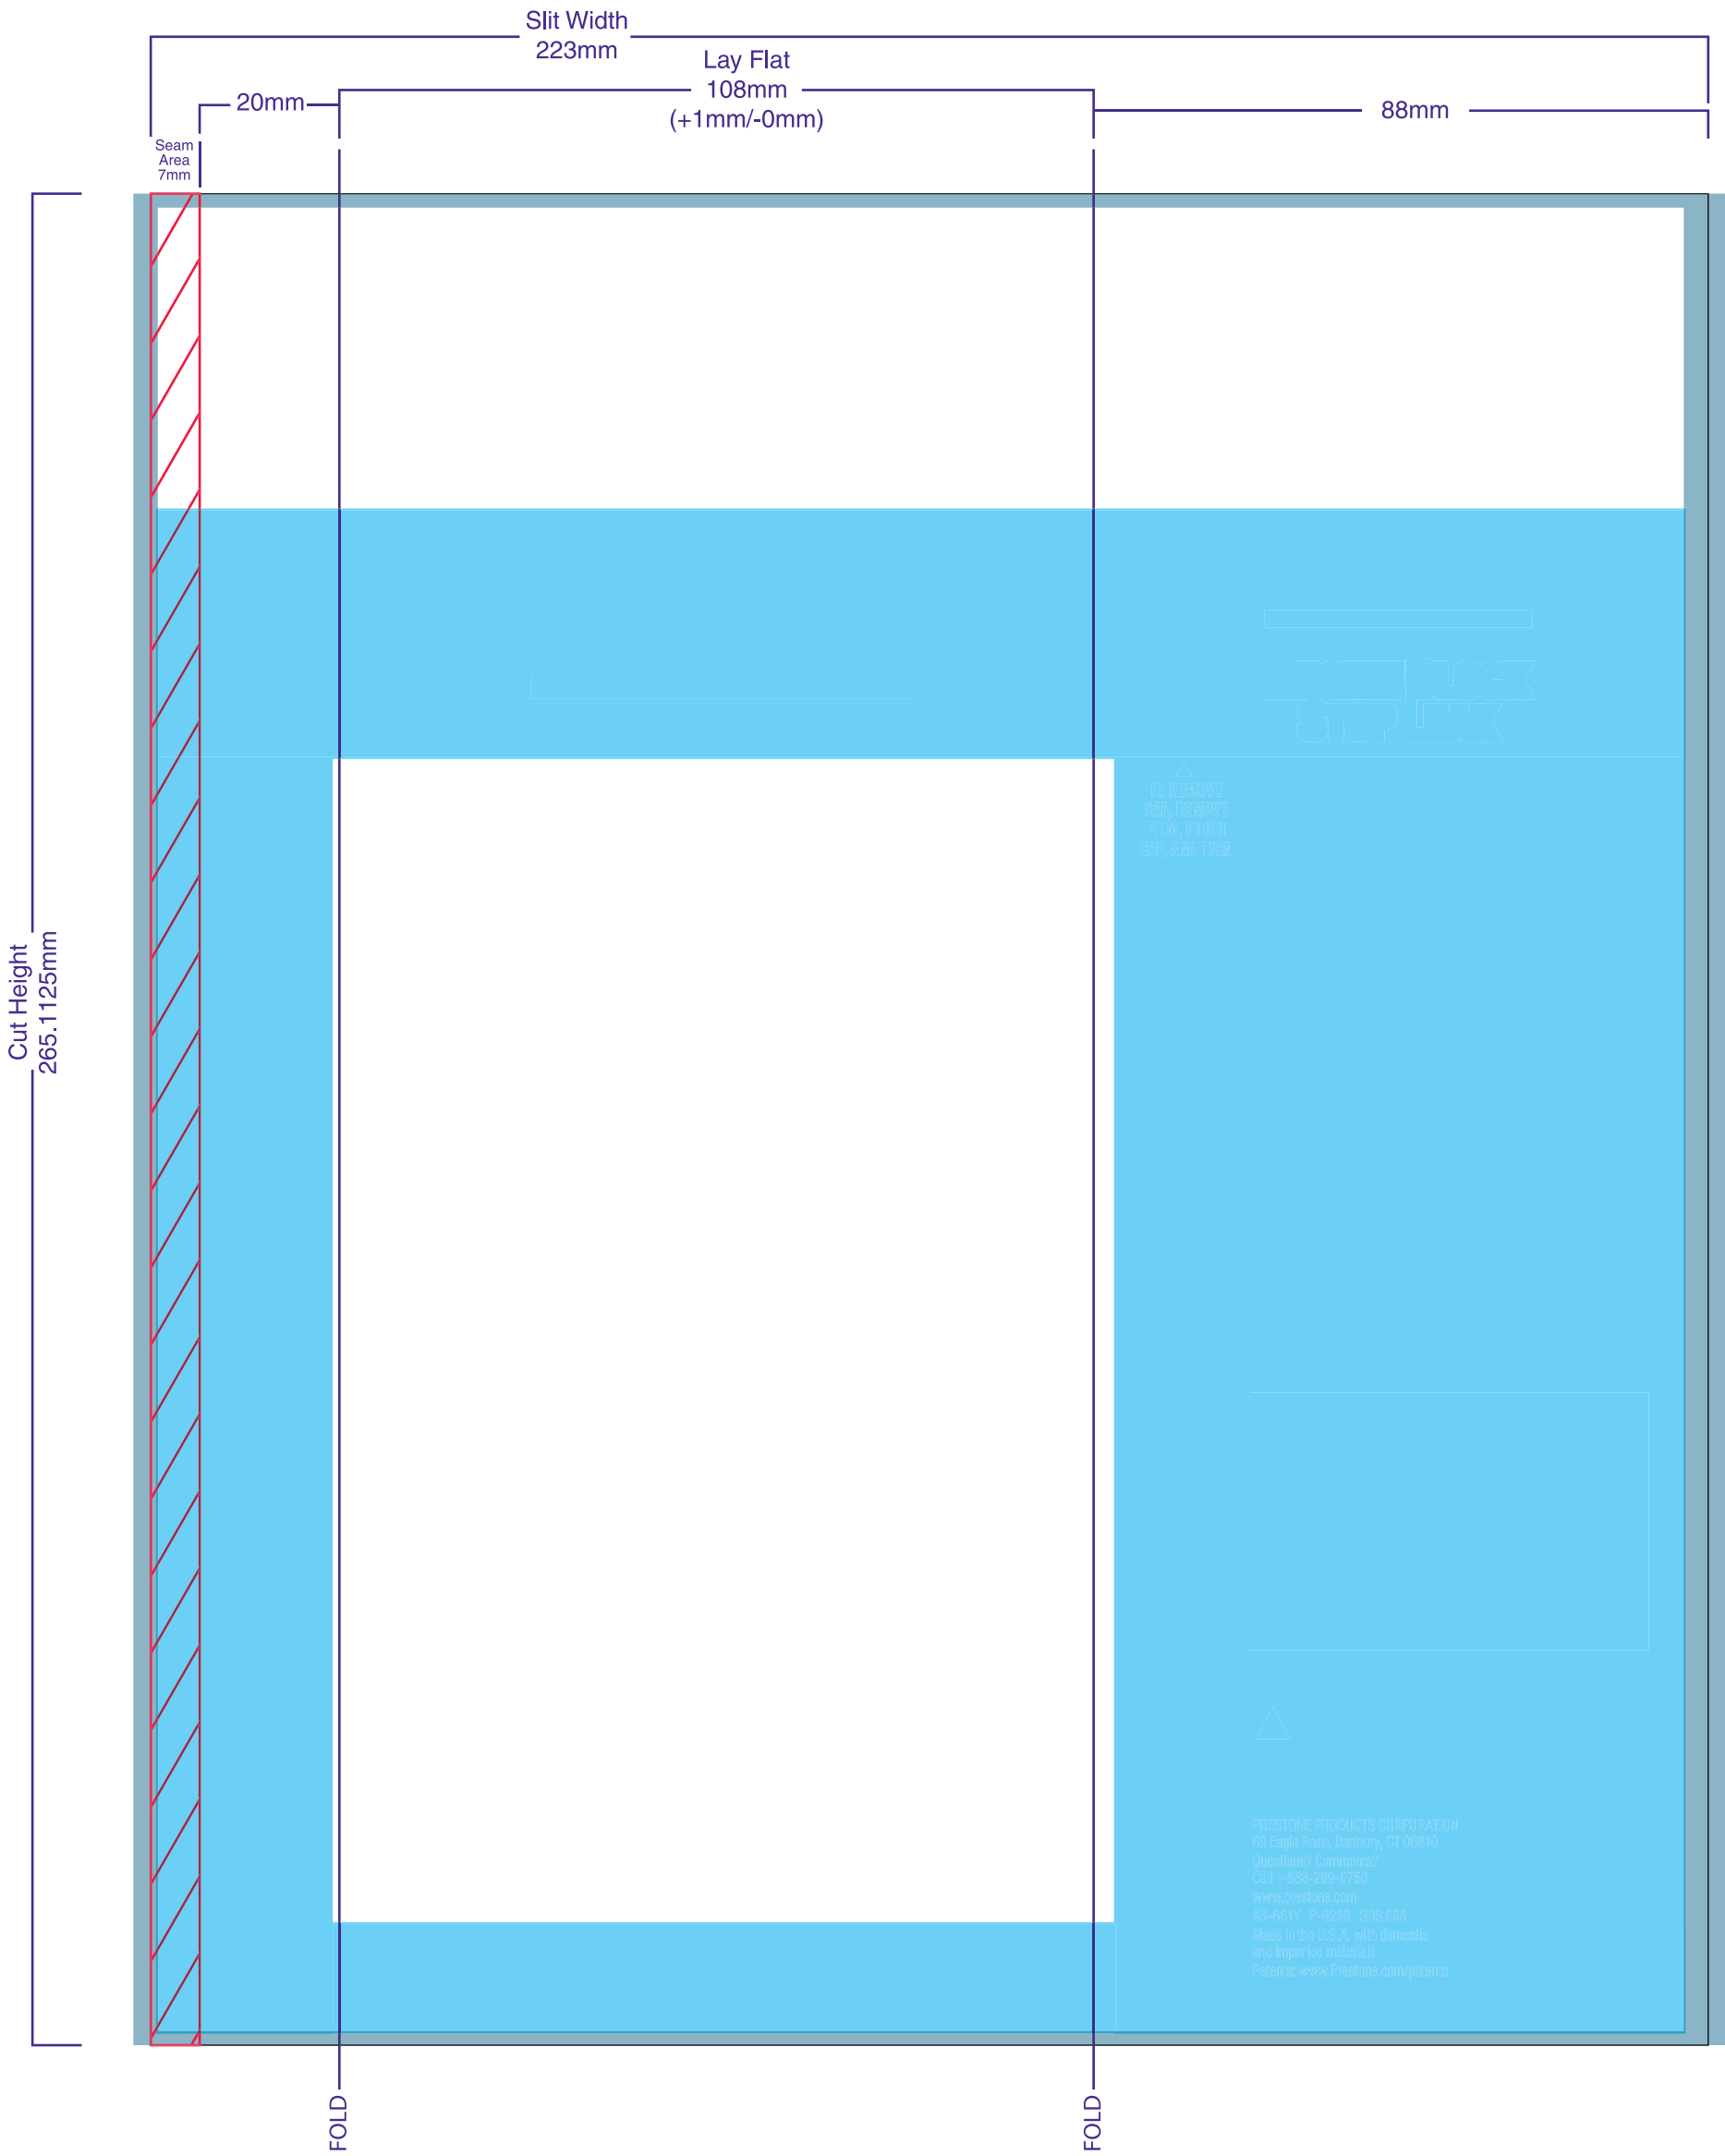

This page represents the print location of the varnish.

alexm

To avoid delays, please approve this proof by end of day Monday January 15, 2018.